

# COMPONENT SPECIFICATION

**SERIES NAME** Plain Polypropylene Film Capacitors  
(PP- Inductive)  
**SERIES CODE** 03



**GIVEN BY:** DEKI ELECTRONICS LTD • **APPROVED BY:**

**DEKI ELECTRONICS LTD**

B-20, SECTOR-58, NOIDA 201301


Tel: +91 120 2585457/58 • Fax: +91 120 2585289 • Email: [info@dekielectronics.com](mailto:info@dekielectronics.com)

# Plain Polypropylene Film Capacitors

PP • Inductive • Series Code 03



## Part Number Description

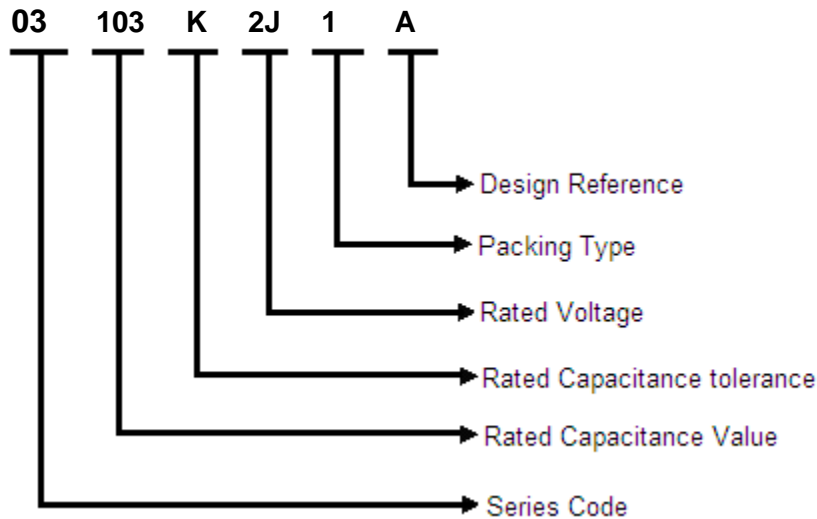

## Rated Capacitance

Three-digit (103) indicate rated capacitance in Pico Farad (First two digits indicate value & third digit indicates number of zeroes to be suffixed to first two digits).

For example:

103 = $10 \times 10^3$ = 10000 pF	= 10 nF	= 0.01 $\mu$ F
104 = $10 \times 10^4$ = 100000 pF	= 100 nF	= 0.1 $\mu$ F
105 = $10 \times 10^5$ = 1000000 pF	= 1000 nF	= 1 $\mu$ F
106 = $10 \times 10^6$ = 10000000 pF	= 10000 nF	= 10 $\mu$ F

## Capacitance Tolerance

In 3<sup>rd</sup> group of the part number-

F =  $\pm 1\%$ , G =  $\pm 2\%$ , H =  $\pm 2.5\%$ , I =  $\pm 3.5\%$ , J =  $\pm 5\%$ , K =  $\pm 10\%$ , L =  $\pm 15\%$ , M =  $\pm 20\%$ , N =  $\pm 40\%$

## Rated Voltage

In 4th group of the part number, one numeric digit and one letter (Ex.-2J) indicate DC voltage rating while two numeric digits (Ex.06) indicate AC voltage rating.

## Rated Voltage Codification

For DC Rated Voltage													
A		B		C		D		E		F		G	
1A	10	1B	12.5	1C	16	1D	20	1E	25	1F	30	1G	40
2A	100	2B	125	2C	160	2D	200	2E	250	2F	300	2G	400
3A	1000	3B	1250	3C	1600	3D	2000	3E	2500	3F	3000	3G	4000
H		I		J		K		L		M		N	
1H	50	1I	45	1J	63	1K	70	1L	80	1M	85	1N	90
2H	500	2I	450	2J	630	2K	700	2L	800	2M	850	2N	900
3H	5000	3I	4500	3J	6300	3K	7000	3L	8000	3M	8500	3N	9000
O		P		Q		R		S		T		U	
1O	110	1P	120	1Q	57.5	1R	15	1S	17	1T	70	1U	130
2O	1100	2P	1200	2Q	575	2R	150	2S	170	2T	700	2U	1300
3O	11000	3P	12000	3Q	5750	3R	1500	3S	1700	3T	70000	3U	13000
For AC Rated Voltage													
01	02	03	04	05	06	07	08	09	10	11	12	13	14
190 VAC	250 VAC	275 VAC	305 VAC	310 VAC	440 VAC	500 VAC	600 VAC	700 VAC	63 VAC	230 VAC	330 VAC	400 VAC	450 VAC

Note: For more detail please contact [info@dekielelectronics.com](mailto:info@dekielelectronics.com)


## Packing Type

- 1: Bulk packing (original pitch)
- 2: Bulk packing (after forming & cutting)
- 3: Ammo packing (after forming & taping)
- 4: Bulk packing (after forming in original pitch without cut)
- 5: Bulk packing (after formed & without cut)
- 6: Ammo packing (Straight lead)
- 7: Bulk packing (Straight lead cut)
- 8: Reel packing (Straight lead)

## Reference Data

Capacitance Value	0.00015 $\mu$ F to 0.033 $\mu$ F
Capacitance Tolerance	$\pm$ 2% to $\pm$ 10%
Rated DC Voltage	100Vdc to 1250Vdc
Permissible AC Voltage at 50/60 Hz	40Vac to 250Vac
Climatic testing class according to IEC 60068-1	40/100/56
Maximum application temperature	100°C
Rated temperature	85°C
Reference standards	IEC 60384-13
Dielectric	Polypropylene
Electrodes	Aluminium Foil
Construction	Inductive
Encapsulation	Coated with epoxy resin
Leads	Tinned wire
Marking on capacitor body	Type of capacitor, capacitance value, tolerance, rated voltage and traceability code will be available on each and every capacitor (Example- D010473K1EP2G)

## Dimensions Description

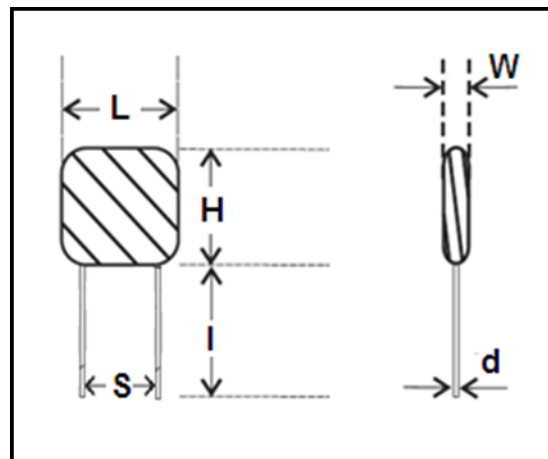

# Plain Polypropylene Film Capacitors

PP • Inductive • Series Code 03



Rated Voltage	Rated Capacitance (µF)	Dimensions (mm)						Part Number
		L (max)	H (max)	W (max)	S	d (±0.05)	l	
100Vdc/70Vac	0.00015	9.5	14	6.5	5±0.5	0.5	17 Min.	03 151 J 2A 1 A
	0.00015	9.5	14	6.5	5±0.5	0.5	5±0.5	03 151 J 2A 7 A
	0.00022	9.5	13	6	5±0.75	0.5	17 Min.	03 221 J 2A 1 A
	0.00022	9.5	13	6	5±0.75	0.5	17 Min.	03 221 K 2A 1 A
	0.00022	9.5	13	6	5±0.5	0.5	5±1.0	03 221 K 2A 2 B
	0.00022	9.5	13	6	5±0.5	0.5	14 Min.	03 221 K 2A 3 A
	0.00027	9	13	6	5±0.75	0.5	17 Min.	03 271 K 2A 1 A
	0.00033	9.5	14	6.5	5±0.75	0.5	17 Min.	03 331 J 2A 1 A
	0.00033	9.5	14	6.5	5±0.75	0.5	17 Min.	03 331 K 2A 1 A
	0.00047	6.5	12	4.5	4±0.75	0.5	17 Min.	03 471 J 2A 1 A
	0.00047	7.5	13	4.5	4±0.75	0.5	17 Min.	03 471 K 2A 1 A
	0.001	7.5	13	4.5	4±0.75	0.5	17 Min.	03 102 J 2A 1 A
	0.001	7.5	13	4.5	4±0.75	0.5	17 Min.	03 102 J 2A 1 Z
	0.0015	7.5	13	5	4±0.75	0.5	17 Min.	03 152 J 2A 1 A
	0.0047	7	12	4.5	4.5±0.75	0.5	17 Min.	03 472 K 2A 1 A
	0.01	8.5	14	5.5	5±0.75	0.5	17 Min.	03 103 J 2A 1 A
	0.01	8.5	14	5.5	5±0.75	0.5	17 Min.	03 103 J 2A 1 Z
	0.012	7.5	12	4.5	5±0.75	0.5	17 Min.	03 123 K 2A 1 A
	0.022	9	12	5.5	6±0.75	0.5	17 Min.	03 223 G 2A 1 D
	0.022	9	12	5.5	6±0.75	0.5	17 Min.	03 223 J 2A 1 D
	0.022	13	10	6	6±0.75	0.5	17 Min.	03 223 K 2A 1 A
	0.027	10	14	6	6±0.75	0.5	17 Min.	03 273 K 2A 1 A
	0.033	11.5	14.5	7.5	6±0.75	0.5	17 Min.	03 333 J 2A 1 A
	0.033	11.5	14.5	7.5	7.5±0.5	0.5	5±0.5	03 333 J 2A 2 A
	0.033	11.5	14.5	7.5	6±0.75	0.5	17 Min.	03 333 K 2A 1 A
	0.033	11.5	14.5	7.5	6±0.75	0.5	17 Min.	03 333 K 2A 6 A
	250Vdc/125Vac	0.0056	8.5	15	5.5	4±0.75	0.5	17 Min.
0.0056		9.5	14	6	5±0.75	0.5	17 Min.	03 562 J 2E 1 B
0.0056		8.5	15	5.5	4±0.5	0.5	5±0.5	03 562 J 2E 7 A
400Vdc/160Vac	0.001	7.5	13	4.5	4±0.75	0.5	17 Min.	03 102 K 2G 1 A
	0.018	13	14	8	7.5±0.75	0.5	17 Min.	03 183 J 2G 1 B
	0.022	13.5	13	9	5±0.75	0.5	17 Min.	03 223 J 2G 1 A
630Vdc/200Vac	0.00033	9.5	14	6.5	5±0.75	0.5	17 Min.	03 331 K 2J 1 A
	0.00047	10	15	6.5	5±0.75	0.5	17 Min.	03 472 J 2J 1 A
	0.00068	10.5	13.5	7.5	5±0.75	0.5	17 Min.	03 682 J 2J 1 A
	0.00068	10.5	13.5	6.5	5±0.75	0.5	17 Min.	03 682 J 2J 1 B
	0.00068	10.5	13.5	6.5	5±0.5	0.5	5±0.5	03 682 J 2J 7 B
	0.00082	7.5	13	5	4.5±0.75	0.5	17 Min.	03 821 J 2J 1 A
	0.00082	7.5	13	5	4±0.75	0.5	17 Min.	03 821 K 2J 1 A
	0.001	8	15	5	5±0.75	0.5	17 Min.	03 102 K 2J 1 B
	0.0015	8.5	15	6	4±0.75	0.5	17 Min.	03 152 J 2J 1 A
	0.0015	8.5	15	6	4±0.75	0.5	17 Min.	03 152 K 2J 1 A
	0.0022	8.5	14	5.5	5±0.75	0.5	17 Min.	03 222 K 2J 1 A
	0.0033	9.5	14	5	5±0.75	0.5	17 Min.	03 332 K 2J 1 A
	0.0047	9.5	13	6	5±0.75	0.5	17 Min.	03 472 K 2J 1 A
	0.0056	9	12.5	7	5±0.75	0.5	17 Min.	03 562 K 2J 1 B
	0.0062	11	15	8	5±0.75	0.5	17 Min.	03 622 K 2J 1 A

Note: For more detail please contact [info@dekielectronics.com](mailto:info@dekielectronics.com)

# Plain Polypropylene Film Capacitors

PP • Inductive • Series Code 03



Rated Voltage	Rated Capacitance (µF)	Dimensions (mm)						Part Number
		L (max)	H (max)	W (max)	S	d (±0.05)	l	
630Vdc/200Vac	0.0082	11.5	15	7.5	5.5±0.75	0.5	17 Min.	03 822 J 2J 1 A
	0.0082	11.5	15	7.5	5.5±0.75	0.5	17 Min.	03 822 K 2J 1 A
	0.0091	11.5	15	7.5	6.5±0.75	0.5	17 Min.	03 912 K 2J 1 A
	0.01	13	15	9	7.5±0.75	0.5	17 Min.	03 103 J 2J 1 A
	0.01	12	15	8	7.5±0.75	0.5	17 Min.	03 103 K 2J 1 A
	0.01	12	15	8	7.5±0.5	0.5	5±0.5	03 103 K 2J 2 A
	0.01	12	15	8	7.5±0.5	0.5	5±0.5	03 103 K 2J 7 A
	0.012	13	15	9	7.5±0.75	0.5	17 Min.	03 123 J 2J 1 A
	0.012	13	15	9	7.5±0.75	0.5	17 Min.	03 123 K 2J 1 B
	0.012	13	15	9	7.5±0.5	0.5	5±1.0	03 123 K 2J 2 B
	0.015	13	19	9	7.5±0.75	0.5	17 Min.	03 153 J 2J 1 A
	0.015	13	19	9	10±0.5	0.5	4.5±0.5	03 153 J 2J 2 A
	0.015	13	19	9	5±0.5	0.5	5±0.5	03 153 J 2J 2 B
	0.015	13	19	9	5±0.5	0.5	5±0.5	03 153 J 2J 7 C
	0.015	13	19	9	7.5±0.75	0.5	17 Min.	03 153 K 2J 1 A
	0.018	11.5	19	7.5	5±0.75	0.5	17 Min.	03 183 J 2J 1 A
	0.018	11.5	19	7.5	5±0.5	0.5	14 Min.	03 183 J 2J 3 A
	0.018	11.5	19	7.5	5±0.5	0.5	17 Min.	03 183 J 2J 6 A
	0.018	11.5	19	7.5	5±0.5	0.5	17 Min.	03 183 J 2J 6 B
	0.018	11.5	19	7.5	5±0.5	0.5	17 Min.	03 183 J 2J 6 C
	0.018	11.5	19	7.5	7.5±0.5	0.5	5±1.0	03 183 K 2J 2 A
	0.018	11.5	19	7.5	5±0.5	0.5	17 Min.	03 183 K 2J 6 A
	0.022	14	18	9	8.8±0.5	0.5	5±1.0	03 223 K 2J 2 B
	0.022	14	18	9	7.5±0.5	0.5	5±0.5	03 223 K 2J 2 D
0.022	14	18	9	8.5±0.5	0.5	5±0.5	03 223 K 2J 7 B	
0.027	13	18.5	9	7.5±0.75	0.5	17 Min.	03 273 K 2J 1 A	
0.033	14	18	9	7.5±0.75	0.5	17 Min.	03 333 K 2J 1 A	
0.033	14	19	9	7.5±0.5	0.5	5±0.5	03 333 K 2J 2 A	
0.033	15	19	10	7.5±0.5	0.5	5±0.5	03 333 K 2J 2 B	
1000Vdc/200Vac	0.00022	9.5	13	6	5±0.75	0.5	17 Min.	03 221 K 3A 1 A
	0.00022	9.5	13	6	4.5±0.5	0.5	17 Min.	03 221 K 3A 6 B
	0.00027	9	13	6	5±0.75	0.5	17 Min.	03 271 K 3A 1 A
	0.00027	9	13	6	5±0.5	0.5	5±0.5	03 271 K 3A 7 A
	0.00033	9	13	6	5±0.75	0.5	17 Min.	03 331 K 3A 1 A
	0.00047	9	14	5.5	5±0.75	0.5	17 Min.	03 471 J 3A 1 B
	0.00047	9	14	5.5	5±0.75	0.5	17 Min.	03 471 K 3A 1 B
	0.00047	9	14	5.5	5±0.5	0.5	17 Min.	03 471 K 3A 6 B
	0.00068	6	13	4.5	5±0.75	0.5	17 Min.	03 681 J 3A 1 A
	0.00068	6	13	4.5	5±0.75	0.5	17 Min.	03 681 J 3A 1 U
	0.00068	6.5	13	4.5	5±0.75	0.5	17 Min.	03 681 K 3A 1 A
	0.00068	11.5	15	8	5±0.75	0.5	17 Min.	03 682 K 3A 1 A
	0.00068	11.5	15	8	5±0.75	0.5	17 Min.	03 682 K 3A 1 V
	0.00068	11.5	15	8	5±0.75	0.5	17 Min.	03 682 K 3A 1 Z
	0.00068	11.5	15	8	7.5±0.5	0.5	5±0.5	03 682 K 3A 2 A
	0.00068	11.5	15	8	5±0.5	0.5	5±0.5	03 682 K 3A 7 A
	0.00082	7.5	13	5	4.5±0.75	0.5	17 Min.	03 821 K 3A 1 A
	0.001	8.5	14	6	4.5±0.75	0.5	17 Min.	03 102 K 3A 1 A

Note: For more detail please contact [info@dekielelectronics.com](mailto:info@dekielelectronics.com)

# Plain Polypropylene Film Capacitors

PP • Inductive • Series Code 03



Rated Voltage	Rated Capacitance (μF)	Dimensions (mm)						Part Number
		L (max)	H (max)	W (max)	S	d (±0.05)	l	
1000Vdc/200Vac	0.001	8.5	14	6	5(-0.2/+0.8)	0.5	3.75±1.0	03 102 K 3A 2 B
	0.001	8.5	14	6	5±0.5	0.5	14 Min.	03 102 K 3A 6 B
	0.001	8.5	14	6	4.5±0.5	0.5	5±0.5	03 102 K 3A 7 A
	0.0015	8.5	15	6	5±0.75	0.5	17 Min.	03 152 K 3A 1 A
	0.0015	8.5	15	6	5±0.5	0.5	17 Min.	03 152 K 3A 6 A
	0.0022	8.5	15	6	5±0.75	0.5	17 Min.	03 222 H 3A 1 A
	0.0022	8.5	15	6	5±0.75	0.5	17 Min.	03 222 J 3A 1 A
	0.0022	8.5	15	6	5±0.75	0.5	17 Min.	03 222 K 3A 1 A
	0.0027	10.5	14	6.5	5±0.75	0.5	17 Min.	03 272 K 3A 1 A
	0.0033	9.5	15	6	5±0.75	0.5	17 Min.	03 332 K 3A 1 A
	0.0033	9.5	15	6	7.5±0.5	0.5	5±1.0	03 332 K 3A 2 B
	0.0047	11.5	15	8.5	5±0.75	0.5	17 Min.	03 472 J 3A 1 A
	0.0047	11.5	15	8.5	5±0.75	0.5	17 Min.	03 472 J 3A 1 U
	0.0047	11	15	8	5±0.75	0.5	17 Min.	03 472 K 3A 1 A
	0.0056	11	15	8	5±0.75	0.5	17 Min.	03 562 K 3A 1 A
	0.0062	11	15	8	5±0.75	0.5	17 Min.	03 622 K 3A 1 A
	0.0082	12	15	8	6±0.75	0.5	17 Min.	03 822 J 3A 1 B
	0.0082	12	15	8	6±0.75	0.5	5±0.5	03 822 K 3A 1 B
	0.0082	12	15	8	6±0.5	0.5	5±0.5	03 822 K 3A 2 B
	0.01	12.5	14	8.5	7.5±0.75	0.5	17 Min.	03 103 K 3A 1 B
0.01	12.5	14	8.5	7.5±0.5	0.5	5±0.5	03 103 K 3A 2 B	
0.01	12.5	14	8.5	5±0.5	0.5	5±0.5	03 103 K 3A 2 C	
0.012	12.5	14	8.5	7.5±0.5	0.5	5±0.5	03 123 K 3A 2 C	
1250/250Vac	0.0047	10.5	15	6.5	5±0.75	0.5	17 Min.	03 472 K 3B 1 A

## Specific Data

Description	Value
Maximum tangent of loss angle (Tanδ)	0.001 at 1 kHz
Voltage proof test between leads	2 times of the rated DC voltage for 2 second
Insulation Resistance (R <sub>IS</sub> )	C <sub>R</sub> ≤0.1 μF                      C <sub>R</sub> >0.1 μF
(or) time constant T= C <sub>R</sub> × R <sub>IS</sub> at 25° C, relative humidity ≤70%	≥100000 MΩ                      ≥10000 s

## Endurance Test


Loaded at 1.5 times of rated voltage at 85°C or 1.25 times of the category voltage at 100°C for 1000 hours. Category voltage is 80% of the rated voltage.

### After The Test

ΔC/C	: ≤ 5% of initial value.
Tan δ	: ≤ 1.4 times value measured before the test
Insulation Resistance	: ≥ 50% of the value mentioned in specific data

## Temperature Derating Graph


For temperature between 85°C and 100°C a decreasing factor of 1.25% per °C on the rated voltage  $V_R$  has to be applied.

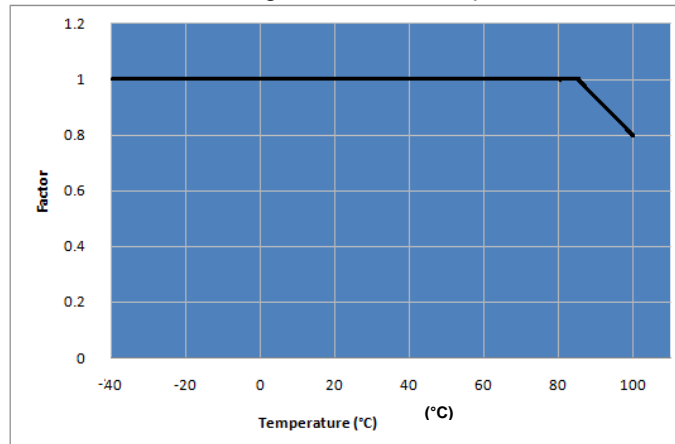

## Power Dissipation and Maximum Component Temperature Rise

After applying the A.C voltage to the capacitor with certain frequency, we can measure the hot spot temperature of the capacitor. From that we can calculate  $\Delta T$ .

$\Delta T$  = hot spot temperature – ambient temperature

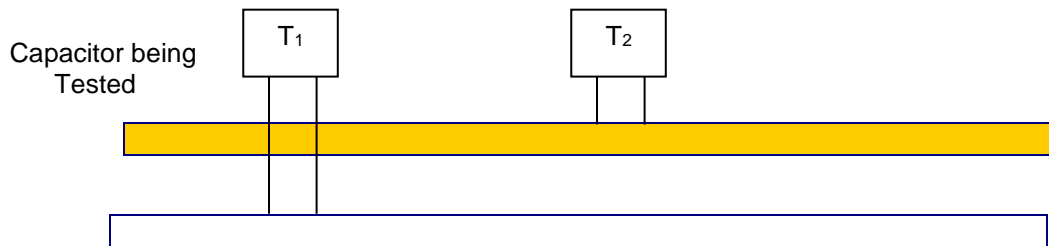

$T_1$  is the capacitor under test (Connected in the circuit)

$T_2$  is capacitor which has no connection

Distance between  $T_1$  and  $T_2$  should be about 50mm and 100mm from other components. To avoid radiation or convection, the capacitor should be tested in a wind-free box. The capacitor under test is separated by polystyrene.

$$\Delta T_{\max} = T_1 - T_2$$

at one frequency level the  $\Delta T_{\max}$  reach 10°C. That is the frequency which we have to start frequency derating.

## Storage Conditions

Avoid storing the capacitors in places where the environmental conditions differ from the following:

- Storage time:  $\leq 24$  months from the date marked on the label glued to the package.
- Temperature: -40 to 80°C
- Humidity:
  - Average per year:  $\leq 70\%$
  - For 30 full days randomly distributed throughout the year:  $\leq 85\%$
  - Dew: absent

After a longer period of storage or use, the tolerance can increase; but, according to standard specification, it may never exceed twice the value measured at the time of delivery.

## Disclaimer

All our capacitors are designed, manufactured and tested to specifications. We strictly adhere to standards in procurement of materials, in the laid down manufacturing processes and consistently apply stringent process controls and testing parameters. This ensures that our capacitors always perform to the offered specifications.

Appropriateness of use in a specific circuit and fitness to a particular application however needs to be verified and its reliability through expected lifetime is required to be validated by the customer. Deki's responsibility is limited to ensuring that the capacitor performs as claimed in the specification/ data sheets provided by Deki. Deki specifically disclaims any implied warranties of fitness for any particular purpose. Liability, in any case is limited to the price paid for the capacitors.

Note: For more detail please contact [info@dekielectronics.com](mailto:info@dekielectronics.com)