

# COMPONENT SPECIFICATION

**SERIES NAME** AC & Pulse Metallized Polypropylene Film  
Capacitors (MPP/MPP Series)  
**SERIES CODE** 30



**GIVEN BY:** DEKI ELECTRONICS LTD


**DEKI ELECTRONICS LTD**

B-20, SECTOR-58, NOIDA 201301

Tel: +91 120 2585457/58 • Fax: +91 120 2585289 • Email: [rd@dekielectronics.com](mailto:rd@dekielectronics.com)

# Ac & Pulse Metallized Polypropylene Film Capacitors (MPP/MPP) Box Type • Series Code 30

## Part Number Description

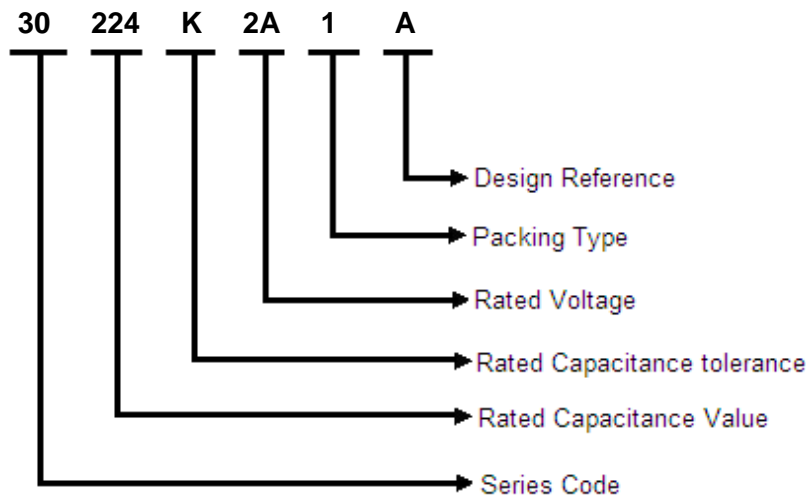

## Rated Capacitance

Three-digit (224) indicate rated capacitance in Pico Farad (First two digits indicate value & third digit indicates number of zeroes to be suffixed to first two digits).

For example:

103 = 10 × 10 <sup>3</sup>	= 10000 pF	= 10 nF	= 0.01 μF
104 = 10 × 10 <sup>4</sup>	= 100000 pF	= 100 nF	= 0.1 μF
105 = 10 × 10 <sup>5</sup>	= 1000000 pF	= 1000 nF	= 1 μF
106 = 10 × 10 <sup>6</sup>	= 10000000 pF	= 10000 nF	= 10 μF

## Capacitance Tolerance

In 3<sup>rd</sup> group of the part number-

F = ±1%, G = ±2%, H = ±2.5%, I = ±3.5%, J = ±5%, K = ±10%, L = ±15%, M = ±20%, N = ±40%

## Rated Voltage

In 4<sup>th</sup> group of the part number, one numeric digit and one letter (Ex.-2A) indicate DC voltage rating while two numeric digits (Ex.03) indicate AC voltage rating.

## Rated Voltage Codification

For DC Rated Voltage													
A		B		C		D		E		F		G	
1A	10	1B	12.5	1C	16	1D	20	1E	25	1F	30	1G	40
2A	100	2B	125	2C	160	2D	200	2E	250	2F	300	2G	400
3A	1000	3B	1250	3C	1600	3D	2000	3E	2500	3F	3000	3G	4000
H		I		J		K		L		M		N	
1H	50	1I	45	1J	63	1K	70	1L	80	1M	85	1N	90
2H	500	2I	450	2J	630	2K	700	2L	800	2M	850	2N	900
3H	5000	3I	4500	3J	6300	3K	7000	3L	8000	3M	8500	3N	9000
O		P		Q		R		S		U		V	
1O	110	1P	120	1Q	1U	1U	15	1S	17	1U	130	1V	60
2O	1100	2P	1200	2Q	2U	2U	150	2S	170	2U	1300	2V	600
3O	11000	3P	12000	3Q	3U	3U	1500	3S	1700	3U	13000	3V	6000
For AC Rated Voltage													
01	02	03	04	05	06	07	08	09	10	11	12	13	14
190 VAC	250 VAC	275 VAC	305 VAC	310 VAC	440 VAC	500 VAC	600 VAC	700 VAC	63 VAC	230 VAC	330 VAC	400 VAC	450 VAC

# Ac & Pulse Metallized Polypropylene Film Capacitors (MPP/MPP) Box Type • Series Code 30

## Packing Type

- 1: Bulk packing (original pitch)
- 2: Bulk packing (after forming & cutting)
- 3: Ammo packing (after forming & taping)
- 4: Bulk packing (after forming in original pitch without cut)
- 5: Bulk packing (after formed & without cut)
- 6: Ammo packing (Straight lead)
- 7: Bulk packing (Straight lead cut)
- 8: Reel packing (Straight lead)


## Reference Data

Capacitance	0.001 $\mu$ F to 0.15 $\mu$ F
Capacitance Tolerance	$\pm$ 5% to $\pm$ 10% $\pm$ 20%
Rated Voltage	1000 Vdc to 2000 Vdc
Permissible AC voltage at 50Hz/60Hz	400 Vac to 700 Vac
Climatic testing class according to IEC 60068-1	40/100/56
Maximum application temperature	100°C
Rated temperature	85°C
Reference standards	IEC 60384-16
Dielectric	Polypropylene
Electrodes	Metallized
Construction	Series
Encapsulation	Encased in flame retardant box filled with resin
Leads	Tinned wire
Marking example on capacitor body	MPP/MPP D224J3B /LOT NO**

Compatibility to RoHS



## Dimensions Description

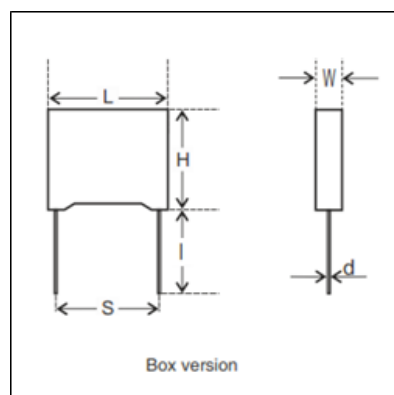

# Ac & Pulse Metallized Polypropylene Film Capacitors (MPP/MPP) Box Type • Series Code 30



Rated Voltage	Rated Capacitance (µF)	Dimensions (mm)						dV/dt (V/µs)	Part Number	
		W (±0.5)	H (±0.5)	L (±0.5)	d (±0.05)	S (±0.75)	I			
1000Vdc/400Vac	0.01	6.0	12.0	18.0	0.8	15.0	15 Min.	3000	30 103 K 3A 1 A	
	0.018	5.0	11.0	18.0	0.8	15.0	15 Min.	3000	30 183 +3A*^	
	0.068	8.5	16.0	18.0	0.8	15.0	15 Min.	3000	30 683 +3A*^	
	0.1	10.0	16.0	18.0	0.8	15.0	15 Min.	3000	30 104 +3A*^	
1250Vdc/500Vac	0.0082	5	10.8	18	0.8	15	15 Min.	3300	30 822 +3B*^	
	0.01	5	10.8	18	0.8	15	15 Min.	3300	30 103 +3B*^	
	0.012	6	11.9	18	0.8	15	15 Min.	3300	30 123 +3B*^	
	0.015	6	11.9	18	0.8	15	15 Min.	3300	30 153 +3B*^	
	0.018	7.5	13.5	18	0.8	15	15 Min.	3300	30 183 +3B*^	
	0.022	7.5	13.5	18	0.8	15	15 Min.	3300	30 223 +3B*^	
	0.027	8.5	14.5	18	0.8	15	15 Min.	3300	30 273 +3B*^	
	0.033	10	16	18	0.8	15	15 Min.	3300	30 333 +3B*^	
	0.039	10	16	18	0.8	15	15 Min.	3300	30 393 +3B*^	
	0.033	6	15	26.5	0.8	22.5	15 Min.	2100	30 333 +3B*^	
	0.039	6	15	26.5	0.8	22.5	15 Min.	2100	30 393 +3B*^	
	0.047	7	16	26.5	0.8	22.5	15 Min.	2100	30 473 +3B*^	
	0.056	7	16	26.5	0.8	22.5	15 Min.	2100	30 563 +3B*^	
	0.068	8.5	17	26.5	0.8	22.5	15 Min.	2100	30 683 +3B*^	
	0.082	10	18.5	26.5	0.8	22.5	15 Min.	2100	30 823 +3B*^	
	0.1	10	18.5	26.5	0.8	22.5	15 Min.	2100	30 104 +3B*^	
	0.22	13	22.0	32.0	0.8	27.5	15 Min.	350	30 224 J 3B 1 A	
	0.22	13	22.0	32.0	0.8	27.5	15 Min.	350	30 224 K 3B 1 A	
	1600Vdc/500Vac	0.0022	5	10.8	18	0.8	15	15 Min.	4500	30 222 +3C*^
		0.0033	5	10.8	18	0.8	15	15 Min.	4500	30 332 +3C*^
0.0039		6	11.9	18	0.8	15	15 Min.	4500	30 392 +3C*^	
0.0047		6	11.9	18	0.8	15	15 Min.	4500	30 473 +3C*^	
0.0056		6	11.9	18	0.8	15	15 Min.	4500	30 563 +3C*^	
0.0068		6	11.9	18	0.8	15	15 Min.	4500	30 683 +3C*^	
0.0082		7.5	13.5	18	0.8	15	15 Min.	4500	30 823 +3C*^	
0.01		7.5	13.5	18	0.8	15	15 Min.	4500	30 103 +3C*^	
0.015		8.5	14.5	18	0.8	15	15 Min.	4500	30 153 +3C*^	
0.015		9	18.0	18	0.8	15	15 Min.	4500	30 153 K 3C 1A	
0.022		10	16	18	0.8	15	15 Min.	4500	30 223 +3C*^	
0.0056		5	10.8	18	0.8	15	15 Min.	6000	30 562 +3C*^	
0.0068		5	10.8	18	0.8	15	15 Min.	6000	30 682 +3C*^	
0.0082		6	11.9	18	0.8	15	15 Min.	6000	30 822 +3C*^	
0.01		6	11.9	18	0.8	15	15 Min.	6000	30 103 +3C*^	
0.012		7.5	13.5	18	0.8	15	15 Min.	6000	30 123 +3C*^	
0.015		7.5	13.5	18	0.8	15	15 Min.	6000	30 153 +3C*^	
0.018		8.5	14.5	18	0.8	15	15 Min.	6000	30 183 +3C*^	
0.022		10	16	18	0.8	15	15 Min.	6000	30 223 +3C*^	
0.027		10	16	18	0.8	15	15 Min.	6000	30 273 +3C*^	
0.027	6	15	26.5	0.8	22.5	15 Min.	3000	30 273 +3C*^		





# Ac & Pulse Metallized Polypropylene Film Capacitors (MPP/MPP) Box Type • Series Code 30




	0.033	7	16	26.5	0.8	22.5	15 Min.	3000	30 333 +3C*^
	0.039	7	16	26.5	0.8	22.5	15 Min.	3000	30 393 +3C*^
	0.047	8.5	17	26.5	0.8	22.5	15 Min.	3000	30 473 +3C*^
	0.056	10	18.5	26.5	0.8	22.5	15 Min.	3000	30 563 +3C*^
	0.068	10	18.5	26.5	0.8	22.5	15 Min.	3000	30 683 +3C*^
2000Vdc/700Vac	0.001	5	10.8	18	0.8	15	15 Min.	9500	30 102 +3D*^
	0.0012	5	10.8	18	0.8	15	15 Min.	9500	30 122 +3D*^
	0.0015	5	10.8	18	0.8	15	15 Min.	9500	30 152 +3D*^
	0.0018	5	10.8	18	0.8	15	15 Min.	9500	30 182 +3D*^
	0.0022	5	10.8	18	0.8	15	15 Min.	9500	30 222 +3D*^
	0.0027	5	10.8	18	0.8	15	15 Min.	9500	30 272 +3D*^
	0.0033	5	10.8	18	0.8	15	15 Min.	9500	30 332 +3D*^
	0.0039	5	10.8	18	0.8	15	15 Min.	9500	30 392 +3D*^
	0.0047	5	10.8	18	0.8	15	15 Min.	9500	30 472 +3D*^
	0.0056	6	11.9	18	0.8	15	15 Min.	9500	30 562 +3D*^
	0.0068	6	11.9	18	0.8	15	15 Min.	9500	30 682 +3D*^
	0.0082	7.5	13.5	18	0.8	15	15 Min.	9500	30 822 +3D*^
	0.01	7.5	13.5	18	0.8	15	15 Min.	9500	30 103 +3D*^
	0.012	8.5	14.5	18	0.8	15	15 Min.	9500	30 123 +3D*^
	0.015	8.5	14.5	18	0.8	15	15 Min.	9500	30 153 +3D*^
	0.018	10	16	18	0.8	15	15 Min.	9500	30 183 +3D*^
	0.0047	6	15	26.5	0.8	22.5	15 Min.	3500	30 472 +3D*^
	0.0056	6	15	26.5	0.8	22.5	15 Min.	3500	30 562 +3D*^
	0.0068	6	15	26.5	0.8	22.5	15 Min.	3500	30 682 +3D*^
	0.0082	6	15	26.5	0.8	22.5	15 Min.	3500	30 822 +3D*^
	0.01	6	15	26.5	0.8	22.5	15 Min.	3500	30 103 +3D*^
	0.012	6	15	26.5	0.8	22.5	15 Min.	3500	30 123 +3D*^
	0.015	6	15	26.5	0.8	22.5	15 Min.	3500	30 153 +3D*^
	0.018	6	15	26.5	0.8	22.5	15 Min.	3500	30 183 +3D*^
	0.022	6	15	26.5	0.8	22.5	15 Min.	3500	30 223 +3D*^
	0.027	7	16	26.5	0.8	22.5	15 Min.	3500	30 273 +3D*^
	0.033	8.5	17	26.5	0.8	22.5	15 Min.	3500	30 333 +3D*^
	0.039	10	18.5	26.5	0.8	22.5	15 Min.	3500	30 393 +3D*^
	0.047	10	18.5	26.5	0.8	22.5	15 Min.	3500	30 473 +3D*^

\*All dimension in mm, += capacitor tolerance, \*=packing type,  
\*\* if any other enquiry please feel free contact to us, rd@dekielectronics.com

Voltage (Vrms) And Current (Irms) VS Frequency Derating Graph

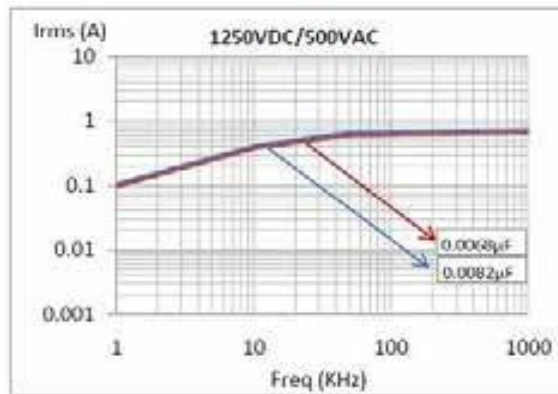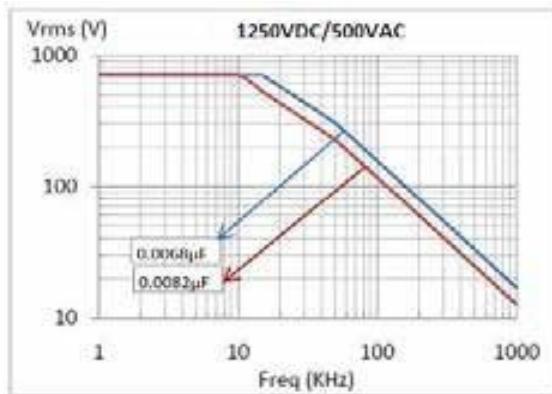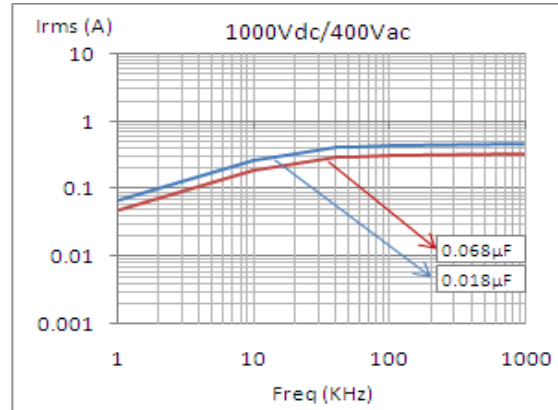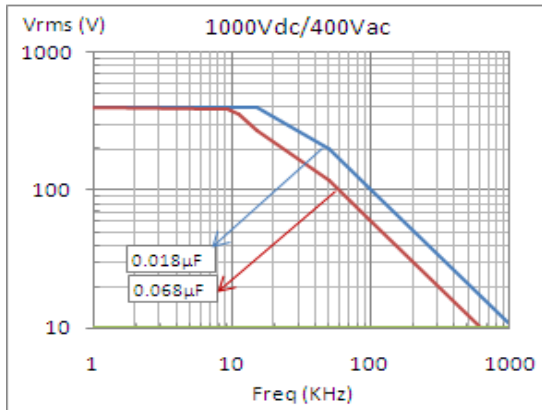

# Ac & Pulse Metallized Polypropylene Film Capacitors (MPP/MPP) Box Type • Series Code 30

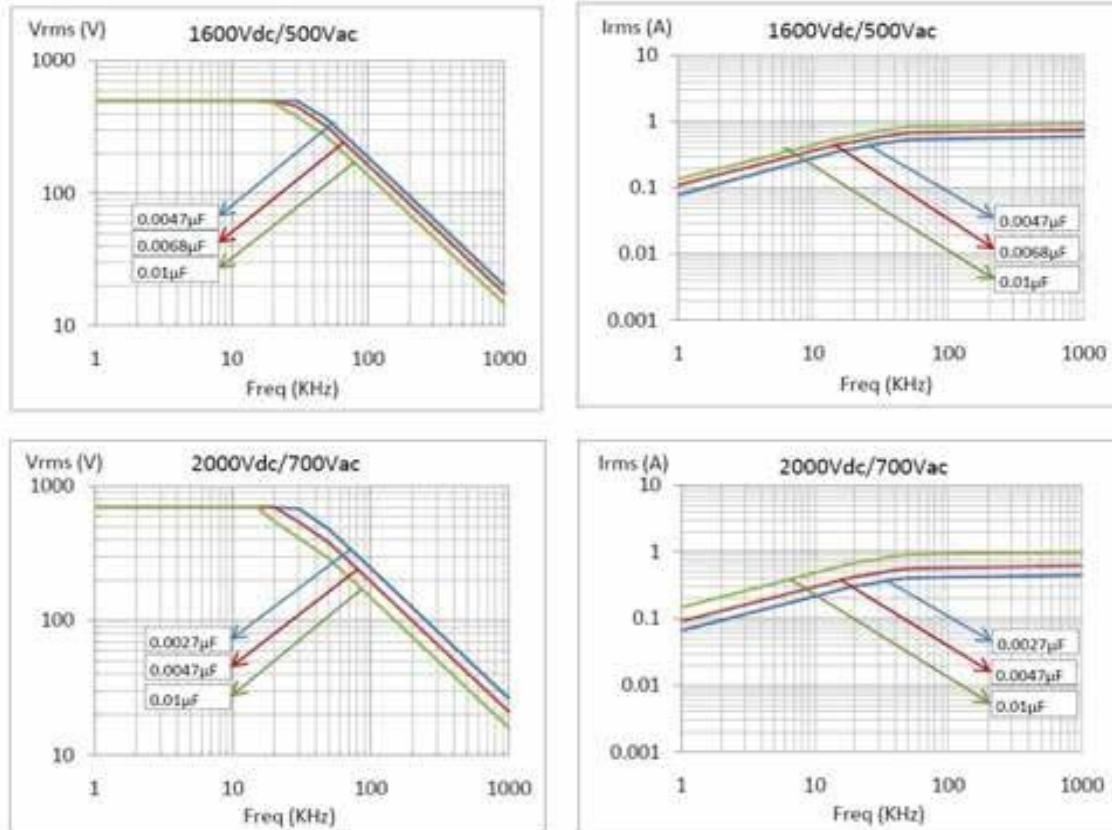

## Specific Data

Description	Value		
Maximum tangent of loss angle (Tanδ)	Frequency	$C_R \leq 0.1\mu F$	$0.1\mu F < C_R \leq 1\mu F$
	1 kHz	0.0005	0.0005
	10 kHz	0.0008	0.0008
	100 kHz	0.0025	-
Voltage proof test between leads	1.6 times of the rated DC voltage for 2 second		
Insulation Resistance ( $R_{IS}$ )	$C_R \leq 0.33\mu F$	$C_R > 0.33\mu F$	
(or) time constant $T = C_R \times R_{IS}$	$\geq 100000M\Omega$	$\geq 30000$ s	
at 25° C, relative humidity $\leq 70\%$			

## Endurance Test

Loaded at 1.25 times of rated voltage at 85° C for 1000 hours.

After The Test


$\Delta C/C$  :  $\leq 10\%$  of initial value.

Increase of Tan δ :  $\leq 0.005$  at 1 kHz

Insulation Resistance :  $\geq 50\%$  of the value mentioned in specific data.

## Temperature Derating Graph


For temperature between 85°C and 100°C a derating factor of 1.25% per °C on the rated voltage  $V_R$  has to be applied.

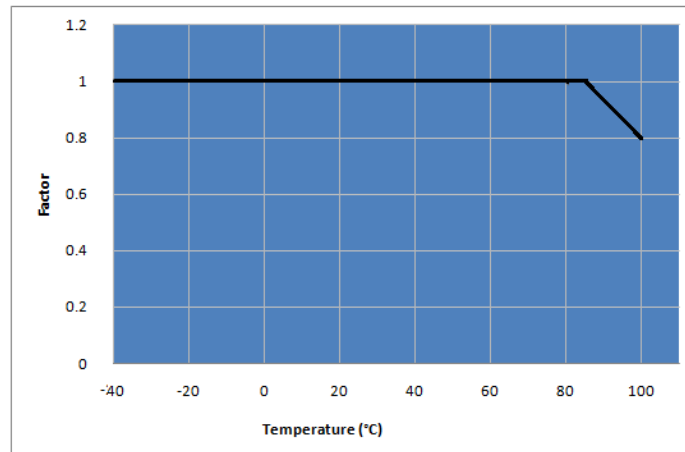

## Power Dissipation and Maximum Component Temperature Rise

After applying the A.C voltage to the capacitor with certain frequency, we can measure the hot spot temperature of the capacitor. From that we can calculate  $\Delta T$ .

$\Delta T$  = hot spot temperature – ambient temperature

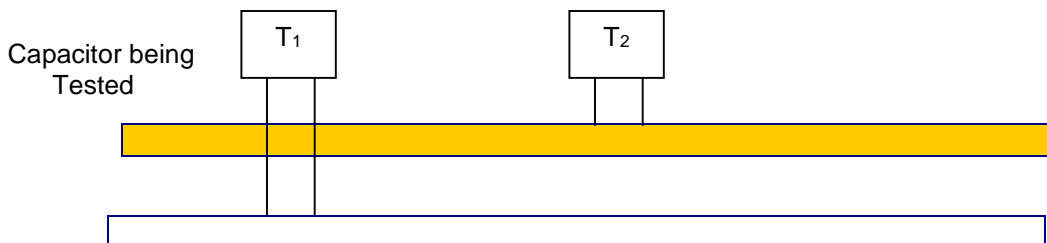

$T_1$  is the capacitor under test (Connected in the circuit)

$T_2$  is capacitor which has no connection

Distance between  $T_1$  and  $T_2$  should be about 50mm and 100mm from other components. To avoid radiation or convection, the capacitor should be tested in a wind-free box. The capacitor under test is separated by polystyrene.

$$\Delta T_{\max} = T_1 - T_2$$

at one frequency level the  $\Delta T_{\max}$  reach 10°C. That is the frequency which we have to start frequency derating.



## Storage Conditions

Avoid storing the capacitors in places where the environmental conditions differ from the following:

Storage time: ≤ 24 months from the date marked on the label glued to the package.

- Temperature: -40 to 80°C
- Humidity:
  - Average per year: ≤70%
  - For 30 full days randomly distributed throughout the year: ≤85%
  - Dew: absent

After a longer period of storage or use, the tolerance can increase; but, according to standard specification, it may never exceed twice the value measured at the time of delivery.

## Disclaimer

All our capacitors are designed, manufactured and tested to specifications. We strictly adhere to standards in procurement of materials, in the laid down manufacturing processes and consistently apply stringent process controls and testing parameters. This ensures that our capacitors always perform to the offered specifications.

Appropriateness of use in a specific circuit and fitness to a particular application however needs to be verified and its reliability through expected lifetime is required to be validated by the customer. Deki's responsibility is limited to ensuring that the capacitor performs as claimed in the specification/ data sheets provided by Deki. Deki specifically disclaims any implied warranties of fitness for any particular purpose. Liability, in any case is limited to the price paid for the capacitors.